




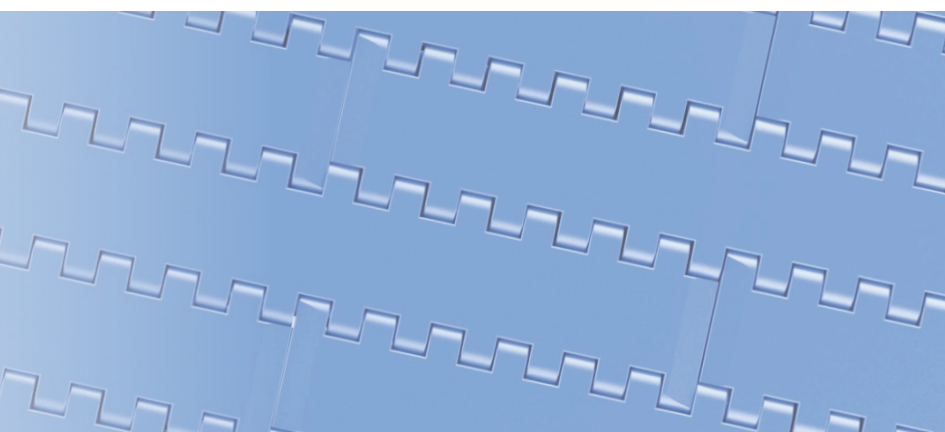


F254HD-50AHD2

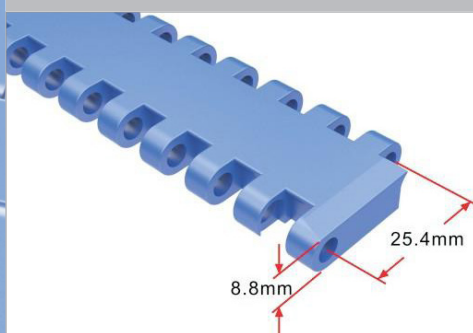

Pitch	Min. width	Open area	EU	Ø Rod	Flight	Sidewall	Curve
25,4 mm	76 mm	0 %	✓	4,9 mm	✓	✗	✗

Material	Color	Resistance of the straight belt		Temperature		Belt weight
		Kg/m width	N/m width	°C (min.)	°C (max.)	Kg/m ²
Polypropylene PP	 	2000	20000	1	100	5,4
Acetal POM	  	3500	35000	- 40	80	8,3

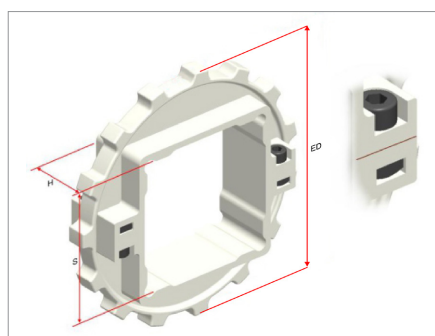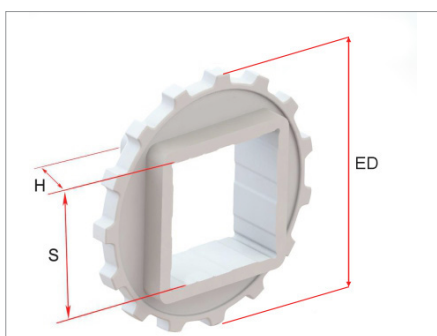

Sprocket dimensions

Nº teeth	Ø pitch PD (mm)	Ø external ED (mm)	Square bore S (mm)	Round bore D (mm)	Width H (mm)	Keyway K (mm)
10	82,20	80	38,1 / 40	25 / 25,4	25	8 x 8
12	98,14	96,7	38,1 / 40	25,4 / 30 / 38,1 / 40	25	8 x 8
12-Split	98,14	96,7	38,1 / 40	38,1	25	9,52 x 4,76
15	122,17	121,3	38,1 / 40 / 50 / 60 / 63,5	25,4 / 35 / 40 / 50	29,5	8 x 8
15-Split	122,17	121,3	38,1 / 40 / 50 / 60 / 63,5 / 65	-	33	-
18	146,27	146	38,1 / 40 / 45 / 50 / 60 / 63,5 / 64	25,4 / 30 / 50	25	8 x 8
18-Split	146,27	146	38,1 / 40 / 60 / 63,5	50,8	35	14 x 5
19-Split	154,32	154,5	38,1 / 40 / 50 / 50,8 / 60 / 65	-	35	-
24-Split	194,60	194	60 / 65	-	52	-