



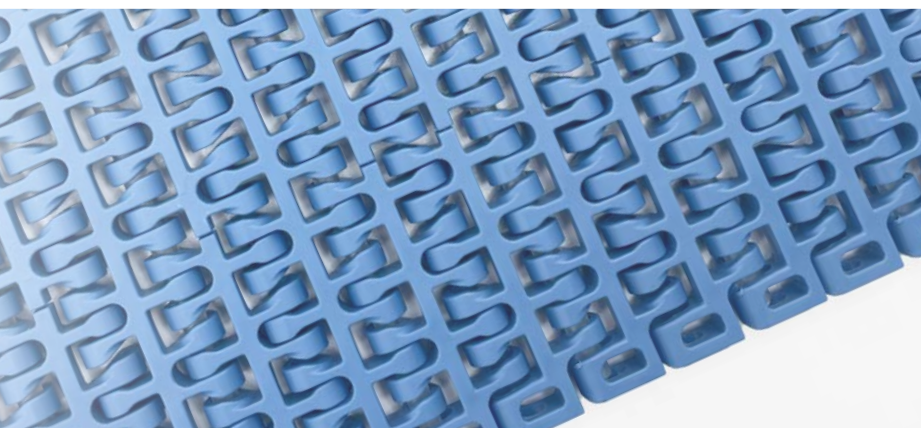

G152-11SBE

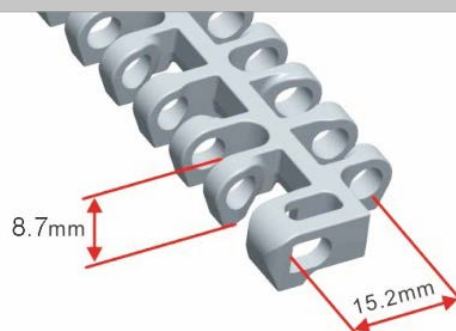

Pitch	Open area	FDA & EU	Ø Rod	Flight	Sidewall	Curve
15,2 mm	28 %	✓	4,5 mm	✓	✗	✗


Material	Color	Resistance of the straight belt	Temperature		Belt weight
		Kg/m width	°C (min.)	°C (max.)	Kg/m ²
Polypropylene PP	BL, WH*	1040	1	100	5,1
Polyethylene PE	BL, NT*	670	- 60	60	5,9
Acetal POM	BL, WH*	1650	- 40	80	7,4

Widths

Modules		Minimum belt width (mm)	Width increments (mm)
Central (mm)	Side (mm)		
152,4	50,8 / 102	152,8	25,4



Minimum turning diameter

	Flexing Ø A (mm)	Back flexing Ø B (mm)
	25	60

*Consult availability.

BL= Blue, NT= Natural, WH= White.