



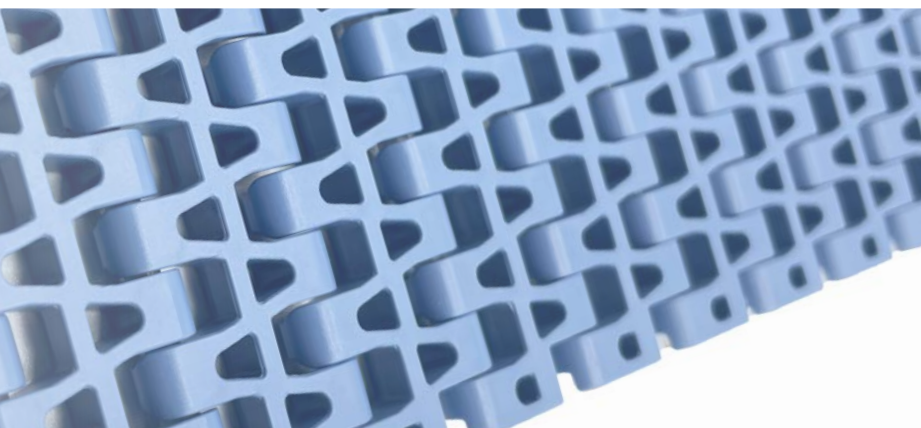

G254-25SB


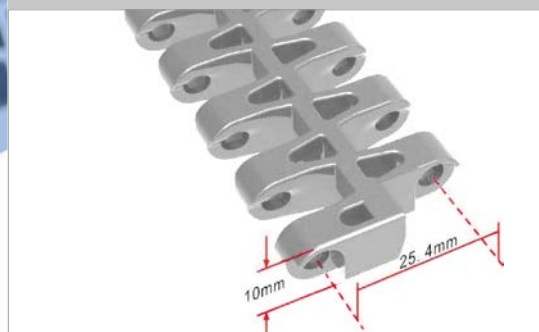


Pitch	Open area	FDA & EU	Ø Rod	Flight	Sidewall	Curve
25,4 mm	31,7 %	✓	4,9 mm	✓	✗	✗

Material	Color	Resistance of the straight belt	Temperature		Belt weight
		Kg/m width	°C (min.)	°C (max.)	Kg/m ²
Polypropylene PP	BL, WH	1060	1	110	5,15
Polyethylene PE	BL, NT	1030	- 60	60	5,41
Acetal POM	BL, WH	1720	- 40	85	8,15

Widths

Modules	Minimum belt width (mm)	Width increments (mm)
Side (mm)		
50,3 / 100,5 / 201	50,3	16,75

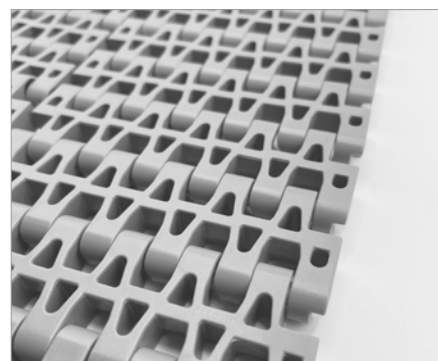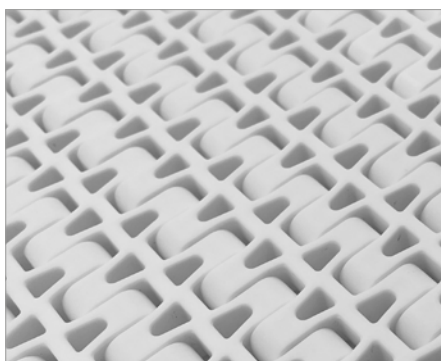

**Consult availability.*

BL= Blue, NT= Natural, WH= White.